Contracting organization	Mascot International A/S, Denmark		
Project team	Corporate Responsibility Department, Mascot International A/S		
Review of Mascot's Life-Cycle Assessment (LCA) methodology and product LCA	Quantis Sàrl, Switzerland		
Method validity date	December 2023 Methodology is valid for 5 years		
Method	ISO 14040:2006 + A1:2020 / ISO 14044:2006 + A1:2018 + A2:2020. Product Environmental Footprint Category Rules (PEFCR) for Apparel and Footwear is followed when possible.		
Description of system boundaries	Cradle to grave		
LCIA method	EF 3.1 (adapted)		
Data collection	Primary data – main source. Generic data from ecoinvent v.3.10 APOS database Reference year is 2024		
LCA software used	SimaPro v.9.6.0.1		
Data quality	Method for data quality rating (DQR) developed in alignment with the PEF requirements.		
Data quality declaration	High (rated as described in PEFCR for Apparel and Footwear).		
Limitations	Style studies are based on reference sizes as defined in PEFCR for apparel and footwear. Current model is also based on reference colours. For other sizes and colours, the reader is encouraged to bear this in mind.		
LCA methodology summary report	Contact <u>responsibility@mascot.dk</u> if you are interested in the report.		

# LIFE CYCLE ASSESSMENT FACTSHEET

April 2025 version 2.1

## **TARGET GROUP**

The 19303 is part of a collection designed for a broad target group in different more demanding work situations within contractors, road workers, offshore and wind sector, airport workers and sailors and with laundry agreements.

## LONG-LASTING DURABILITY

By analysing fabric performance requirements and collecting data on customer experience, the LCA is verified by Quantis for an estimated duration of service of use in hard working situations and with industrial wash every week.

#### **CRADLE-TO-GRAVE**

Cradle-to-grave is a scoping of the LCA that calculates the entire lifecycle of a product from Extraction of Raw materials to the Use & Wash and End-of-Life stages. Cradle-to-grave results are presented per use according to PEF Category Rules for Apparel and Footwear.


#### **METHODOLOGY**

MASCOT LCAs is mainly based on primary data from own factories and suppliers. MASCOT LCAs are calculated according to ISO14040/44. The method is verified by Quantis and applies to all colours.



Cradle to Grave: 0,0494 kg CO<sub>2</sub> per use Based on an ISO compliant methodology verified by Quantis

## **PROCESS CHAIN**

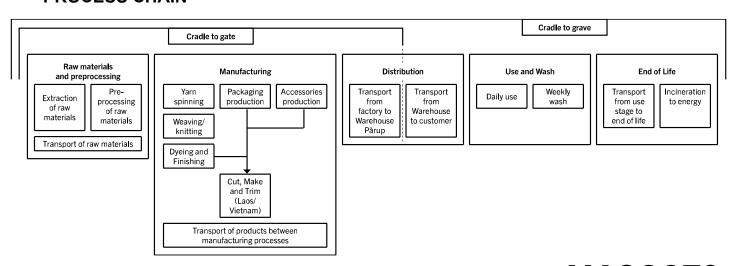



Style: 19303-316

Main fabric: 94%PES/ 6%EA

## THE 16 IMPACT FACTORS

Impact category	Damage assessment unit	Impact to-gate per garment	Impact to-grave per use
Acidification	mol H⁺ eq	0,0316	0,000195
Climate change	kg CO <sub>2</sub> eq	5,9	0,0494
Climate change - Biogenic	kg CO <sub>2</sub> eq	0,0454	0,00064
Climate change - Fossil	kg CO <sub>2</sub> eq	5,84	0,0479
Climate change - Land use and LU change	kg CO <sub>2</sub> eq	0,00785	0,000852
Ecotoxicity, freshwater	CTUe	30,7	0,409
Ecotoxicity, freshwater - part 2	CTUe	21,6	0,125
Ecotoxicity, freshwater - inorganics	CTUe	46,5	0,415
Ecotoxicity, freshwater - organics part 1	CTUe	3,81	0,0995
Ecotoxicity, freshwater - organics part 2	CTUe	2,03	0,0198
Particulate matter	disease inc.	0,000000292	0,0000000178
Eutrophication, marine	kg N eq	0,0065	0,000061
Eutrophication, freshwater	kg P eq	0,0003	0,00000497
Eutrophication, terrestrial	mol N eq	0,0672	0,000474
Human toxicity, cancer	CTUh	0,000000166	0,00000000148
Human toxicity, cancer - inorganics	CTUh	0,000000000736	0,0000000000049
Human toxicity, cancer - organics	CTUh	0,000000158	0,00000000143
Human toxicity, non-cancer	CTUh	0,00000054	0,000000000453
Human toxicity, non-cancer - inorganics	CTUh	0,0000000481	0,00000000041
Human toxicity, non-cancer - organics	CTUh	0,0000000599	0,0000000000432
Ionising radiation	kBq U <sup>-235</sup> eq	0,603	0,00243
Land use	Pt	25,9	0,224
Ozone depletion	kg CFC11 eq	0,00000747	0,0000000265
Photochemical ozone formation	kg NMVOC eq	0,0274	0,000181
Resource use, fossils	MJ	98,8	0,726
Resource use, minerals and metals	kg Sb eq	0,0000814	0,000000327
Water use	m³ depriv.	4,76	0,0224



